


F-DANCER SERIES Floor Interactive LED Display

Dancing with the floor, Fit freely.

Interactive / Waterproof & Skidproof / High load-bearing

FD2.97, FD3.9, FD4.8, FD5.2, FD6.25



PRODUCT DETAILS Floor Interactive LED Display



FEATURES

-  1.INTERACTIVE
Smart interactive sensor design.
-  2.WATERPROOF & SKIDPROOF
IP65 waterproof design and special skidproof mask design
-  3.HIGN LOAD-BEARING
High load-bearing, 1.5T/sqm
-  4.GOOD HEAT DISSIPATION
Heat sink design and aluminum cabinet, speed up the heat conduction.
-  5. TWO INSTALLATION TYPE
Rail or adjustable foot installation, optional.
-  6.TWO CABINET SIZE
Cabinet size could be 500x500mm and 500x1000mm, optional.
-  7.SUPPORT POLE DESIGN
Special support pole design for aging, optional.

F

F-DANCER SERIES Floor Interactive LED Display



Technical Specifications

Part Number	F-DANCER-1.5 (COP)	F-DANCER -1.9 (COP)	F-DANCER -2.6 (COP)	F-DANCER -2.97	F-DANCER -3.9	F-DANCER -5.2	F-DANCER -6.25
Pixel Pitch	1.56mm	1.95mm	2.604mm	2.97mm	3.91mm	5.2mm	6.25mm
LED Configuration	SMD 1010	SMD 1515	SMD 1515	SMD 1415	SMD 1921	SMD 1921	SMD 2727
Pixel Density	409600dot/m ²	262144dot/m ²	147456dot/m ²	112896dot/m ²	65536dot/m ²	36864dot/m ²	25600dot/m ²
Module Size	250X250mm						
Module Resolution	160X160dot	128X128dot	96X96dot	64X64dot	52X52dot	48X48dot	40X40dot
Cabinet Size	500X500X76mm						
Cabinet Resolution	320X320dot	256X256dot	192X192dot	128X128dot	104X104dot	96X96dot	80X80dot
Cabinet Weight	12 kg						
Load Bearing	1.5-2.0t/m ²						
IP Rating (front/back)	IP65 / IP54						
Environment	INDOOR/ OUTDOOR						
Brightness	1000-4000CD/m ²						
Mask	COP			Brown / creamy (Brightness difference)			
Viewing Angle (H/V)	120°/120°						
Gray Scale	≥14bit						
Max.Power Consumption	800W/m ²						
Ave.Power Consumption	270W/m ²						
Refresh Rate	1920/3840Hz						
Operation Power	AC110~ 240V, 50/60Hz						
Scan grade	1/32S	1/32S	1/24S	1/21S	1/16S	1/12S	1/10S
Interactive	○ / ●						
Control Mode	Synchronous display with control PC by DVI						
Support Input	VGA, DVI, HDMI, HD_SDI						
Operating Temperature	0°C~40°C(work), - 20°C~60°C(store)						
Operating Humidity	35%~85% (work), 10%~90% (store)						
Operating Life	≥100,000hours						
Cabinet Material	Aluminum profiles						
Installation	Rail Installation/Adjustable foot installation						
Packaging	Flight Case						
Certificate	CE, FCC, CCC						


P-RODUCT APPLICATION



Shopping Mall



Entertainment Venues

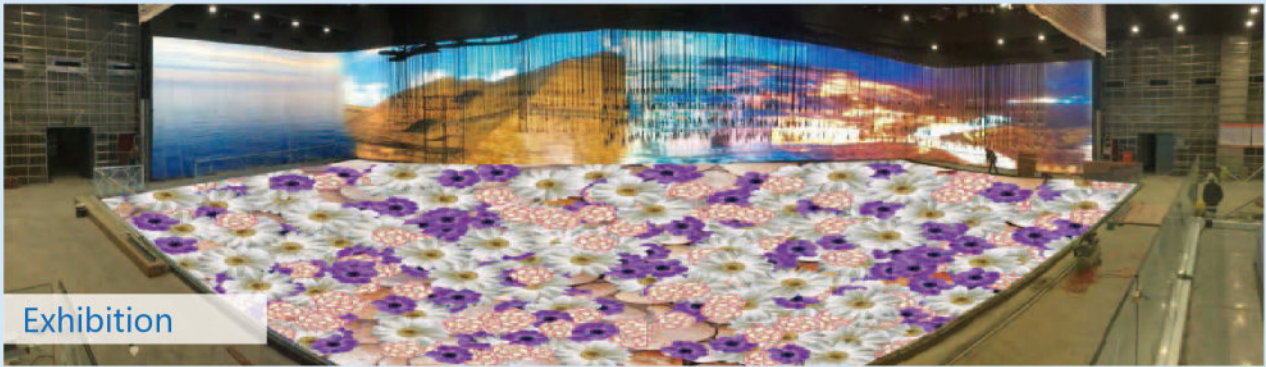


Exhibition



Stage Show



Stage Show

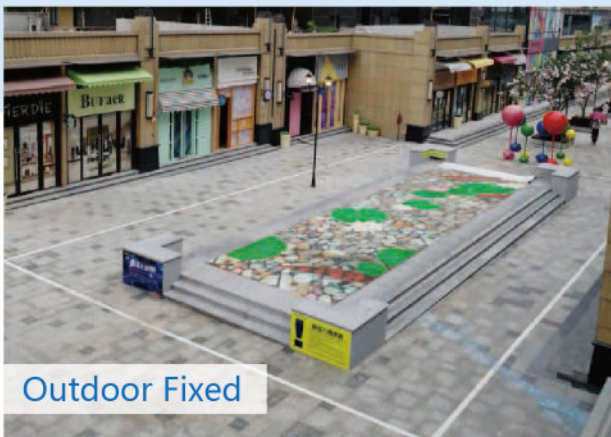

Outdoor Fixed



Scenic Spot